




For the following igus® series

**E2.1**

● E2.48

**E2/000**

● 3500

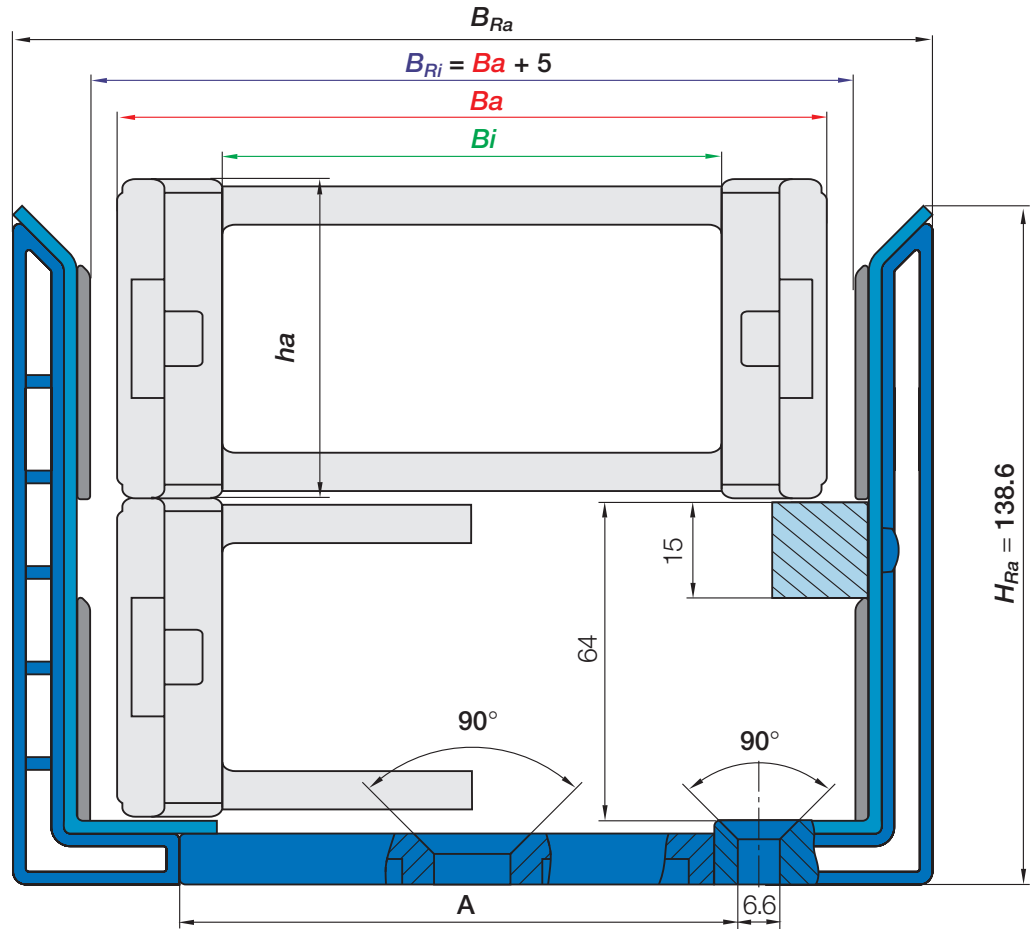

### Installation dimensions

XXX	A	B <sub>Ra</sub>	B <sub>Ri</sub>
050	40	102	74
075	65	127	99
100	90	152	124
115	105	167	139
125	115	177	149
150	140	202	174
175	165	227	199
200	190	252	224
225	215	277	249
250	240	302	274

XXX = Width index

### Snap-in trough | Components

Individual parts	Part No.	Weight
Trough set <b>without</b> glide bars, 2 sections of 2m	93.930	≈ 9.00kg
Trough set <b>with</b> glide bars, 2 sections of 2m	93.931	≈ 10.00kg
Glide bar set, 2 glide bars, 1m section	93.920	
Screw set for glide bar	93.921	
Installation set <b>with</b> spacer plate	93.950.XXX	≈ 0.20kg
Installation set <b>without</b> spacer plate	93.950	≈ 0.16kg

Please add the width index XXX. Example: 93.950.050



Order example: series 3500 for e-chain® inner width 50mm.  
For 20m trough the following parts are required:

10 x 1m, trough sections <b>without</b> glide bars (5 x 2m)	93.930
10 x 1m, trough sections <b>with</b> glide bars (5 x 2m)	93.931
Installation set with spacer plate (21x)	93.950.050